

LOW PROFILE PRECISION OCXO MV200

Features:

- High stability vs. temperature: up to $\pm 5 \times 10^{-11}$
- 5V or 12V power supply
- Package height from 16 mm down to 10 mm
- Frequency range 10.0 – 100.0 MHz

Power supply	Output	Package type	
5V	SIN	50.8x50.8x16 mm	Z16
12V	HCMOS	50.8x50.8x12.7 mm	Z12.7
		50.8x50.8x10 mm	Z10

ORDERING GUIDE: MV200-C 2 F-12V-SIN-Z12.7-10.0 MHz-LN

Availability of certain stability vs. operating temperature range (for 10 MHz, height 12,7 mm)		$\pm 5 \times 10^{-9}$	$\pm 3 \times 10^{-9}$	$\pm 2 \times 10^{-9}$	$\pm 1 \times 10^{-9}$	$\pm 5 \times 10^{-10}$ **	$\pm 2 \times 10^{-10}$ **	$\pm 1 \times 10^{-10}$ **	$\pm 5 \times 10^{-11}$ **
A	0...+55°C	A	A	A	A	A	A	A	A
B	-10...+60°C	A	A	A	A	A	A	A	NA
C	-20...+70°C	A	A	A	A	A	A	C	NA
D	-40...+70°C	A	A	A	A	A	C	NA	NA
EX	-40...+85°C	A	A	A	A	A	C	NA	NA

A – available, NA – not available, C – consult factory
** - could be package 1 or 2.


For other temperature ranges see designation at the end of Data Sheet.

Availability of certain aging values for certain frequencies		Standard frequencies				
		10.0 MHz (10.0 x k) MHz	12.8 MHz (12.8 x k) MHz	13.0 MHz (13.0 x k) MHz	16.384 MHz (16.384 x k) MHz	20.0 MHz (20.0 x k) MHz
H	$\pm 2 \times 10^{-7}$ /year	NA	NA	NA	A	A
G	$\pm 1 \times 10^{-7}$ /year	A	A	A	A	C
F	$\pm 5 \times 10^{-8}$ /year	A	A	A	C	NA
E	$\pm 3 \times 10^{-8}$ /year	A	A	C	NA	NA
D	$\pm 2 \times 10^{-8}$ /year	A	C	NA	NA	NA
C	$\pm 1 \times 10^{-8}$ /year	A	C	NA	NA	NA


A – available, NA – not available, C – consult factory

Phase noise, dBc/Hz, for 10 MHz		LN	ILN	ULN*
		For 12 V, SIN		
1 Hz	<-95	<-100	<-103	<-108
10 Hz	<-125	<-130	<-133	<-137
100 Hz	<-145	<-153	<-155	<-157
1000 Hz	<-150	<-158	<-160	<-161
10000 Hz	<-155	<-160	<-161	<-162

Package 1:

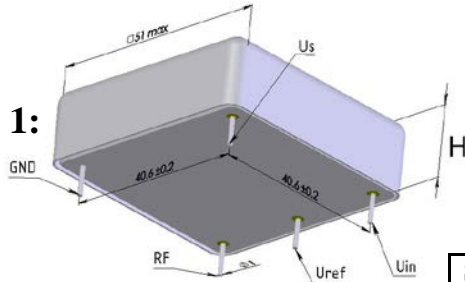

Package 2:

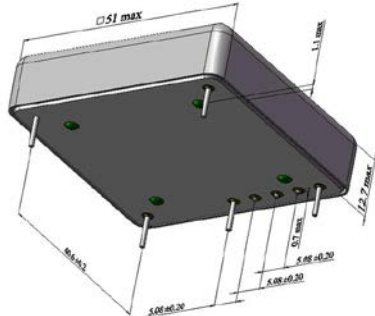

H=19 mm for Z19; H=16 mm for Z16;
H=12.7 mm for Z12.7; H=10 mm for Z10.

Short term stability (Allan deviation) per 1 sec (for 10MHz)	$< 5 \times 10^{-12}$; opt. $< 1 \times 10^{-12}$ opt. $< 6 \times 10^{-13}$ *	
Frequency stability vs. load changes	$< \pm 5 \times 10^{-10}$; opt. $< \pm 2 \times 10^{-10}$	
Frequency stability vs. power supply changes	$< \pm 5 \times 10^{-10}$; opt. $< \pm 2 \times 10^{-10}$	
Warm-up time within accuracy of $< \pm 2 \times 10^{-8}$ @ 25°C	<3 min	
Power supply (Us)	12V $\pm 5\%$	5V $\pm 5\%$
Steady state current consumption @ 25°C	<250mA	<500mA
Peak current consumption during warm-up	<550mA	<1500mA
Frequency pulling range	$> \pm 4 \times 10^{-7}$	
with external voltage range (Uin)	0...5V	0...4.5V
with external potentiometer	20 kOhm	
Reference voltage (Uref)	+5 V	+4.5 V

* for $\pm 5 \times 10^{-10}$ temperature stability

Vibrations:	
Frequency range	10-500 Hz
Acceleration	5g
Shock:	
Acceleration	75 g
Duration	3 ± 1 ms
Storage temperature range	-55...+85 °C

Output	HCMOS	SIN
Level	<0.5V... >4.0V	>300 mV RMS (up to 9 ± 1 dBm - optional for 12V power supply)
Load	10kOhm/30pF	50 Ohm $\pm 5\%$
Rise/Fall time	<6 ns (<3 ns optional)	-
Harmonic suppression	-	>30dBc (>50dBc optional)

Additional notes:

- Please consult factory for daily aging values. Normally typical correspondence of daily aging per day to aging per year is as following: $\pm 1 \times 10^{-7}$ /year - $\pm 1 \times 10^{-9}$ /day; $\pm 5 \times 10^{-8}$ /year - $\pm 5 \times 10^{-10}$ /day; $\pm 3 \times 10^{-8}$ /year - $\pm 3 \times 10^{-10}$ /day.
- Please mention RoHS requirement (if any) while requesting for quote or while placing PO.
- For non standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C:

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85